


PRODUCT DIMENSIONS

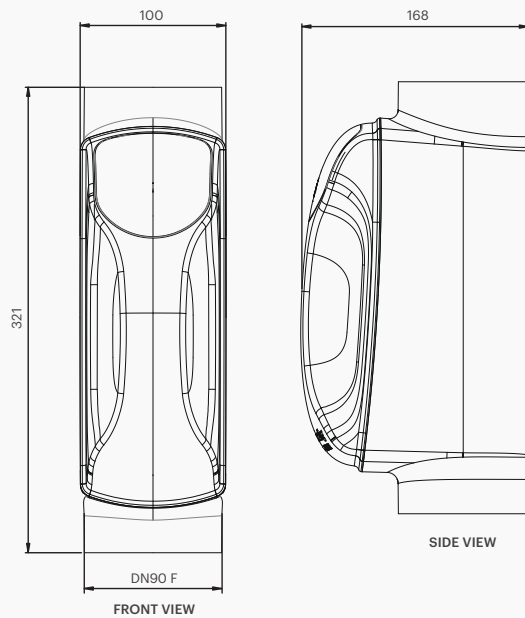

ALL DIMENSIONS IN MM UNLESS OTHERWISE STATED.

Pipe Fitment

RHSL01	DN90 F (socket)	90mm pipe fits inside
--------	-----------------	-----------------------

DISCLAIMER This product specification is not a complete guide to product usage. Product specifications may change without notice. For more information visit rainharvesting.com.au. Keep this manual handy for future reference. © Rain Harvesting Pty Ltd.

COMPLIANCE

- Australian Standard AS/NZS 4020:2005
(Testing of products for use in contact with drinking water)

RAIN HARVESTING
by Blue Mountain Co

+61 (0)7 3248 9600

rainharvesting.com.au

RAIN HARVESTING
by Blue Mountain Co

Leaf Eater Slimline



Installation and Specification Guide

PRODUCT DETAILS

A sleek, streamlined rain head with an anti-splash cover, ideal for decks, verandas and posts for a stylish finish to any home. Features a red overflow indicator when maintenance is required.

RHSL01 90mm

FEATURES AND BENEFITS

- Enclosed rain head for sleek appearance and anti-splash
- Removable filter body for ease of cleaning
- Red debris build up indicator on the overflow flap
- Designed to fit neatly on a 100mm x 100mm post
- Mosquito proof screen (0.955mm stainless steel)
- High flow rate capacity

Installation

WHAT'S IN THE BOX?

- Leaf Eater Slimline

TOOLS/MATERIALS YOU MAY REQUIRE

- Tape measure
- Marker pen
- Saw
- Solvent cement glue

GUTTER, EAVE & "MID" MOUNT

1. Locate the position at which you want to install your Leaf Eater Slimline rain head. This may be directly under your gutter/eave or mid-way down your vertical downpipes. Wherever you choose to install it, your Leaf Eater Slimline rain head must be a minimum of 500mm above your tank inlet and tank overflow pipe.
2. Remove a 270mm section of downpipe at the point of installation. Ensure all cut edges are clean and smooth.
3. Pull out the filter body from your Leaf Eater Slimline rain head.
4. Note the orientation of the rear body – an arrow is located on the inside face to show which direction is up.
5. Apply glue to the bottom pipe and insert into your Leaf Eater Slimline.
6. Insert the top pipe into your Leaf Eater Slimline. This can also be glued if desired.
7. Firmly reinsert the filter body into your installed rear body. Ensure there are no gaps between the rear mounted body and filter body.
8. If desired, you can paint your rain head and cover to match your downpipes or building.

MAINTENANCE

For best performance, check and empty your Leaf Eater Slimline rain head on a regular basis to remove captured leaves and debris. When the red overflow indicator is visible, this is a warning signal to let you know that leaf and debris removal is required.

Remove the filter by pulling it out from the rear body. This may require a little force as the rubber gasket creates a tight seal.

Empty the filter body, removing any captured leaves and debris. Then hose or brush out the filter body to remove finer debris.

The frequency at which maintenance is required will depend on the environment in which your Leaf Eater Slimline rain head is installed. For example, if you install your Leaf Eater Slimline in a high leaf area, maintenance will be required more regularly.

PRODUCT ASSEMBLY

